




The Eddington Flow Regulator is designed to deliver a constant volume of water flow over a wide pressure drop range. The constant flow of water is maintained by the use of the flexible orifice. The flow rate is maintained to within $\pm 15\%$ between 15 and 125 psi. The flow rate varies due to manufacturing tolerances and water temperature. Eddington Industries manufactures flow regulators in various materials such as Nickel Plated Brass, Type 316 SS, and PVC. Eddington Flow Regulators come in various flow rates and are 3/8", 1/2", 3/4", 1" FNPT, and 1 1/4", 1 1/2", 2", 2 1/2", and 3" MNPT and flow rates range from 0.5 to 120 Gallon per minute (GPM). We also use labels that provide extra-strong protection for harsh environments and conditions. They are constructed from durable polyester that is water resistant and tear resistant providing durable and secure protection. All Eddington Flow Regulators are marked with an arrow indicating direction of flow. To ensure proper operation, always install regulator with the arrow pointed downstream.

Made in the USA.

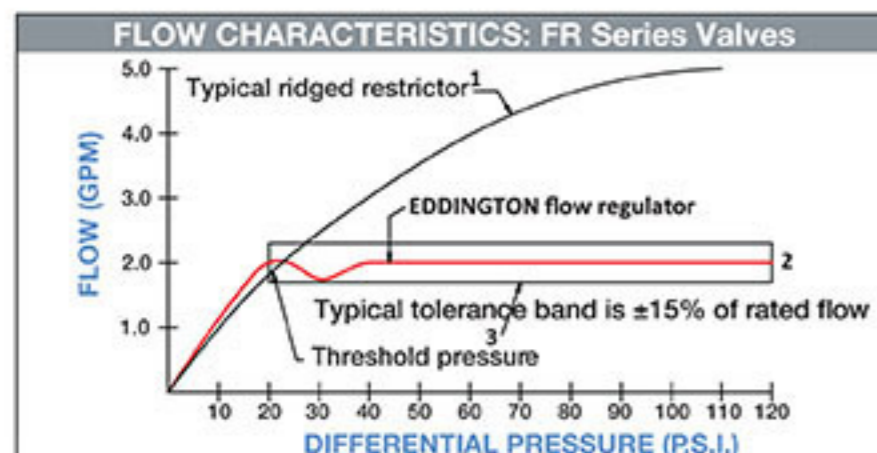

NOTES:

- (1) Calculated flow through 1/8" diameter orifice.
- (2) Typical flow curve of EDDINGTON 2 GPM Flow Regulator.
- (3) Threshold pressure will vary with flow rating.

APPLICATIONS

- Cooling towers
- Water softeners
- Tankless heaters
- Water filters
- Ground water heat pumps
- Irrigation systems
- Pumps (well and packing water)
- Drinking fountains
- Water purifiers

MATERIALS

- PVC, stainless steel, lead free nickel plated brass
- Sizes: 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2, 2 1/2", 3", NPT
- Rubber orifice: Buna, Viton, EPDM
- Custom connections, materials and sizes available
- Lead free (LF) available

Model # (Nickel Plated Brass)	Flow (GPM)	Inlet Connection	Diameter (Inches)	Length (Inches)
FR-038-S	.06 to 1.0	3/8" FNPT	7/8" HEX	1 3/4"
FR-050-S	1.0 to 6.0	1/2" FNPT	1" HEX	1 15/16"
FR-075-S	1.0 to 11.5	3/4" FNPT	1 1/4" HEX	2 9/32"
FR-100-S	1.0 to 30	1" FNPT	1 1/2" HEX	2 3/4"
FR-125-S	1.0 to 30	1 1/4" MNPT	1 1/4" PIPE	3"
FR-150-S	1.0 to 30	1 1/2" MNPT	1 1/2" PIPE	3"
FR-200-S	1.0 to 30	2" MNPT	2" PIPE	3"
FR-250-S	30 to 90	2 1/2" MNPT	2 1/2" PIPE	4"
FR-300-S	30 to 120	3" MNPT	3" PIPE	4 1/2"